

An Innovative Workflow to Refine Exploration Phase Assessment of Unconventional Prospects; using Xrd analysis data and 3D Geo-modeling techniques.

Francois, C, Marechal (Quicksilver Resources Canada Inc.)

Scott Porter, Sasan Ghanbari (Roxar Canada)

Raj M. Damodaran (Roxar, Inc.)

Summary

XRF data collected from 13 wells, and sampled from Drill-cuttings at 5m (16ft), was analyzed and compared with raw log data that was re-sampled to the same 5m intervals. Correlations between a number of mineralogical indicators and the raw logs revealed spatial trends in the data, both from a vertical stratigraphic profile as well as geographically. This was used to generate a stochastic, 3D geo-model tying in more than 140 wells to populate the model with key parameters. Normalized elemental anomalies were correlated with log values in order to establish facies criteria based on both lithological provenance and petrophysical cut-offs, thereby highlighting what are believed to be more fracable shales. Variogram analysis of the spatial distribution of this binary 'facies' category, combined with secondary trends (associating log signatures with postulated regional paleo-geography indicators), provided the basis for building a 3D geo-cellular model of petrophysical facies. Multiple facies realizations were generated (using Sequential Indicator Simulation,) thus capturing the uncertainty in both its size and distribution within each zone of interest. Along with the facies of interest, other associations were identified between some trace elements and total organic carbon (TOC,) which in turn had their own relationship with log signatures. These relationships allowed for TOC to be co-simulated across the region, again capturing uncertainties in both the amount and distribution of TOC within the model. Similar methods were used to profile SiO₂, CaCO₃ and clay content honouring vertical trends, in an attempt to better identify optimal fracability within the shales of interest. The resulting summary statistics and probability maps high-grade areas of interest, capture more accurately geo-spatial distribution of key mineralogical indicators, and thus help to better quantify estimates of potential hydrocarbon volumes early in the exploration phase.


Introduction

Early & credible valuation of a New ventures Prospect is and has always been a challenge. The utilization of direct rock derived measurements can be used to augment& refine the inferable potential normally carried out through petrophysical assessment, geophysical interpretation and engineering reserves estimates.

Theory and/or Method

XRF data collected from 13 wells, and sampled from Drill-cuttings at 5m (16ft), was analyzed and compared with raw log data that was re-sampled to the same 5m intervals. Correlations between a number of mineralogical indicators and the raw logs revealed spatial trends in the data, both from a vertical stratigraphic profile as well as geographically. This was used to generate a stochastic, 3D geo-model tying in more than 140 wells to populate the model with key parameters. Normalized elemental anomalies were correlated with log values in order to establish facies criteria based on both lithological provenance and petrophysical cut-offs, thereby highlighting what are believed to be more fracable shales. Variogram analysis of the spatial distribution of this binary 'facies' category, combined with secondary trends (associating log signatures with postulated regional paleo-geography indicators), provided the basis for building a 3D geo-cellular model of petrophysical facies. Multiple facies realizations were generated (using Sequential Indicator Simulation,) thus capturing the uncertainty in both its size and distribution within each zone of interest. Along with the facies of interest, other associations were identified between some trace elements and total organic carbon (TOC,) which in turn had their own relationship with log signatures. These relationships allowed for TOC to be co-simulated across the region, again capturing uncertainties in both the amount and distribution of TOC within the model. Similar methods were used to profile SiO₂, CaCO₃ and clay content honouring vertical trends, in an attempt to better identify optimal fracability within the shales of interest.

Examples

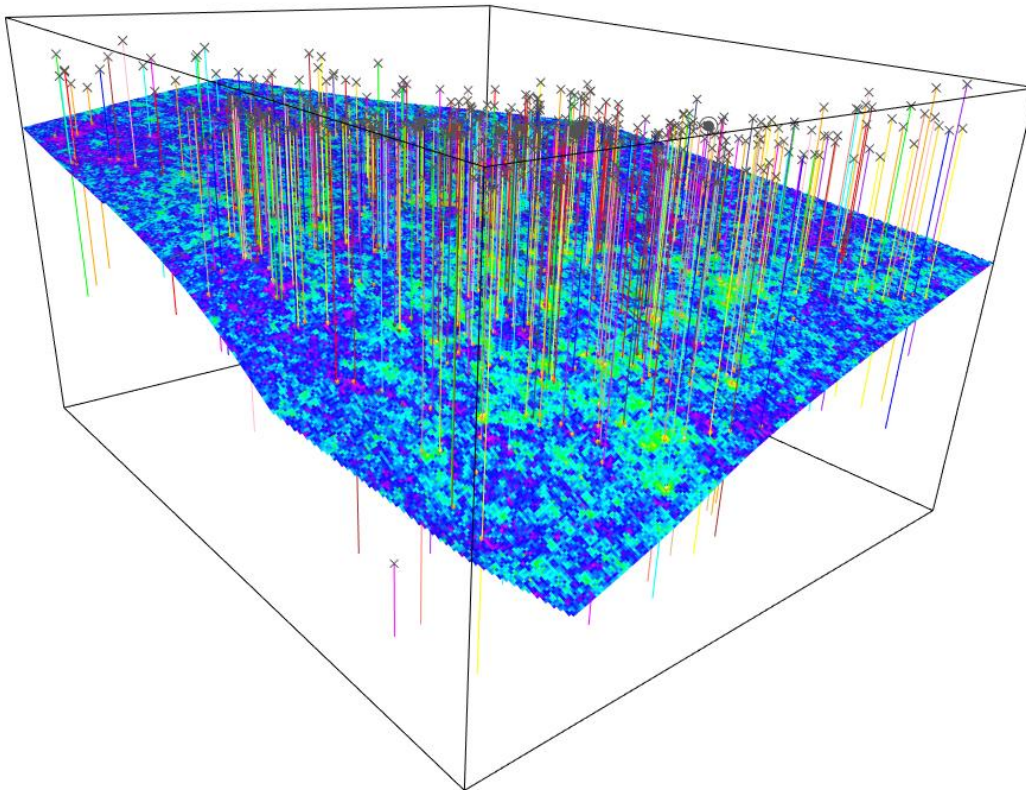

Conclusions

The resulting summary statistics and probability maps high-grade areas of interest, capture more accurately geo-spatial distribution of key mineralogical indicators, and thus help to better quantify estimates of potential hydrocarbon volumes early in the exploration phase.

Using direct rock derived measurements by Xrf profiling of well cuttings can be used to better define the geological aspects of a prospective fairway thereby offering an opportunity to achieve more credible valuation of a New Ventures Prospect's ultimate potential where very a dearth of data exists. In itself, the method can used to augment& refine the more conventionally carried out petrophysical assessment, geophysical interpretation and engineering up-scaled ultimate reserves estimates.

Acknowledgements

Nancy McGrath, Sonia Brar (Roxar, Canada.)